

HOW TO INSTALL

CURTAIN TRACK



Overview

1. Determine the placement of the brackets on the wall
2. Install all the brackets except the final pulley end bracket.
3. Clip the track into the brackets and install the final bracket.
4. Install cord guide for all looped corded tracks.

PULLEY BRACKET:



The end bracket is mounted vertically.

Measure the window opening and the track then divide the difference in half. Measure from the floor to the **top of the gold pulley bracket clip**, not the bracket base, mark this bracket position and install.

CENTRE BRACKET:



The centre brackets are mounted horizontally.

Determine the spacing for the amount of centre brackets supplied.

Measure from the floor to the **flat tab/tongue at the very front of the clip** that fits into the top of the track, using the same measurement as with the pulley bracket. Install all centre brackets.

The track can now be clipped into position to allow accurate placement of the final left hand pulley bracket.

Attaching the track to the brackets.


Clip the track into the right hand pulley bracket, by angling the pulley at 45 degrees and put into the middle slot, the other slots are for adjustment up or down.

Clip the track onto the centre brackets by pushing the track onto the brackets. Do not pull up or down on the brackets.

The left hand pulley bracket can now be measured and installed. To help with this unclip the track from the nearest centre bracket (see below) **DO NOT UNCLIP THE TRACK FROM ALL BRACKETS.** Install the final bracket. Reclip the track onto the end bracket first then the centre bracket.

Unclipping the track

To remove the track, push on the centre spring of clip brackets. Do not pull the track up, down or away from wall without holding down the centre spring on the brackets first.

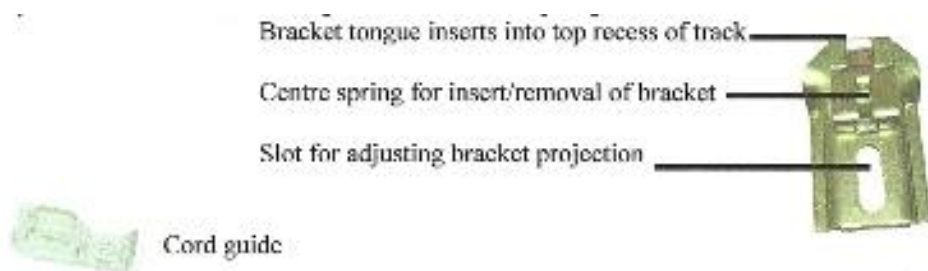

To avoid the possible strangulation hazard for children, the corded internal window covering must be installed so that a loose cord cannot form a loop 220mm or longer at a height of less than 1600mm above floor level. The cord guide may be installed lower than 1600mm above floor level if the cord is sufficiently secured/tensioned to prevent a loop of 22-mm or longer from being formed. The cord guide once installed correctly is designed to prevent a child from being able to remove the cord. Move cots and furniture away from window covering cords or chains.